


## Specification Table

		22 Inch
Panel	Resolution	1920x1080
	Display Area (mm)	477x269
	Aspect Ratio	16:9
	Brightness (cd/m <sup>2</sup> )	500
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	1,000:1
Touch	Touch Technology	Projected Capacitive
	Touch Points	10
	Glass Hardness	7H minimum
Audio	Speaker Type	8W, 3Ω (x2)
AV Inputs	Inputs	HDMI
Power	Power Consumption (W)	35
	Input Voltage	AC220V
Mechanical	Unit Size (WxHxD mm)	536.6x328.6x52.4
	OPS PC Specification	200x119x30 (OPS)
	Package Size (WxHxD mm)	650x457x174
	VESA Holes (mm)	100x100 M6
	Net Weight (kg)	6.65
	Gross Weight (kg)	8.35
Environmental	Operating Temperature	0 °C to 40 °C
	Storage Temperature	-20°C to 60°C
	Operating Humidity	10% to 80%
	Storage Humidity	5% to 95%
Accessories	Included	Open Frame Mounting Bracket, Remote Control, User Manual, Power Cable, USB to USB Cable, Wi-Fi Aerial
	Optional	Windows Slot-in OPS PC, Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand
Warranty	Warranty Period	3 Year Warranty
	Technical Support	Lifetime

Errors and omissions excepted



# Technical Drawing

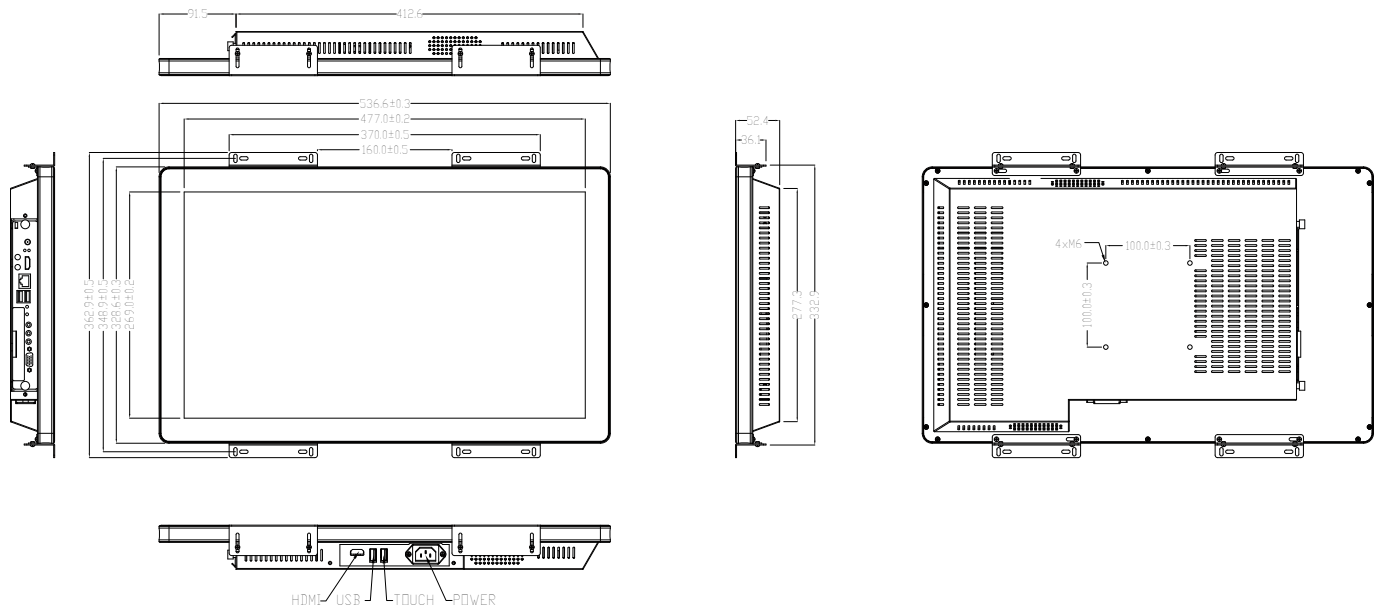


## Specification Table

		32 Inch
Panel	Resolution	1920x1080
	Display Area (mm)	697.4x391.7
	Aspect Ratio	16:9
	Brightness (cd/m <sup>2</sup> )	500
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	1,200:1
Touch	Touch Technology	Projected Capacitive
	Touch Points	10
	Glass Hardness	7H minimum
Audio	Speaker Type	8W (x2)
AV Inputs	Inputs	HDMI
Power	Power Consumption (W)	60
	Input Voltage	AC220V
Mechanical	Unit Size (WxHxD mm)	747.4x441.7x62.7
	OPS PC Specification	200x119x30 (OPS)
	Package Size (WxHxD mm)	835x516x185
	VESA Holes (mm)	200x200 M5
	Net Weight (kg)	9.9
	Gross Weight (kg)	12.3
Environmental	Operating Temperature	0 °C to 40 °C
	Storage Temperature	-20°C to 60°C
	Operating Humidity	10% to 80%
	Storage Humidity	5% to 95%
Accessories	Included	Open Frame Mounting Bracket, Remote Control, User Manual, Power Cable, USB to USB Cable, Wi-Fi Aerial
	Optional	Windows Slot-in OPS PC, Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand
Warranty	Warranty Period	3 Year Warranty
	Technical Support	Lifetime

Errors and omissions excepted



# Technical Drawing

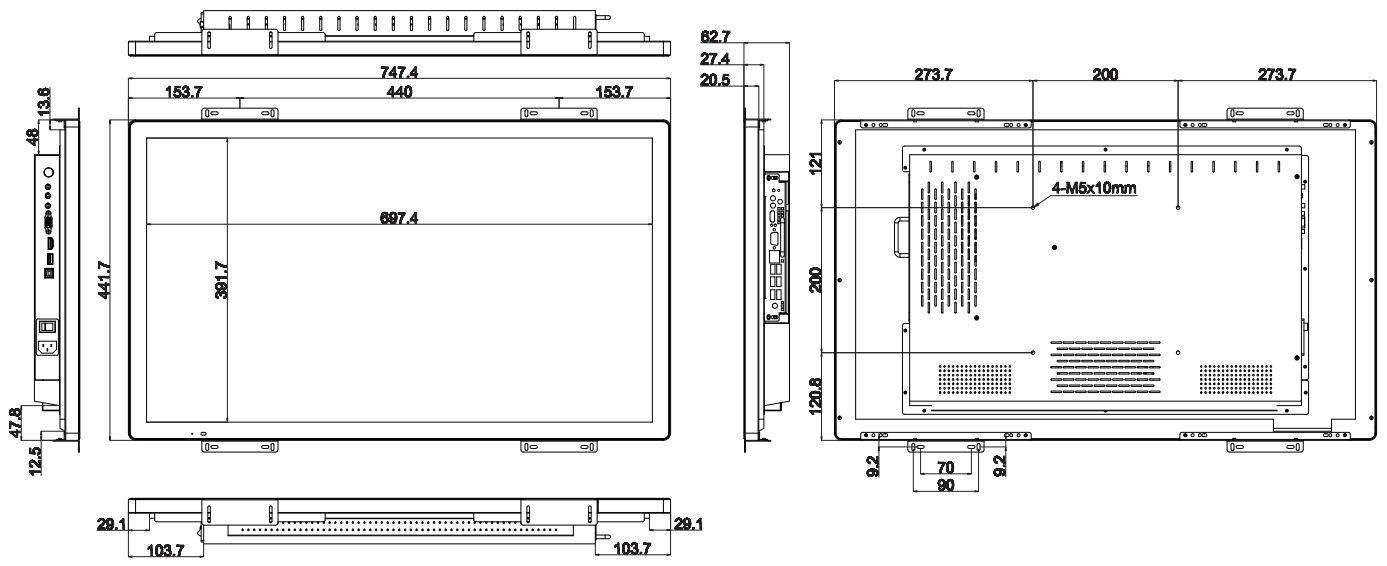



## Specification Table

		43 Inch
Panel	Resolution	3840x2160
	Display Area (mm)	940.2x528.1
	Aspect Ratio	16:9
	Brightness (cd/m <sup>2</sup> )	500
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	1,000:1
Touch	Touch Technology	Projected Capacitive
	Touch Points	10
	Glass Hardness	7H minimum
Audio	Speaker Type	8W (x2)
AV Inputs	Inputs	HDMI
Power	Power Consumption (W)	110
	Input Voltage	AC220V
Mechanical	Unit Size (WxHxD mm)	990.2x578.9x62.3
	OPS PC Specification	200x119x30 (OPS)
	Package Size (WxHxD mm)	1076x650x185
	VESA Holes (mm)	400x200 M6
	Net Weight (kg)	15.4
	Gross Weight (kg)	18.5
Environmental	Operating Temperature	0 °C to 40 °C
	Storage Temperature	-20°C to 60°C
	Operating Humidity	20% to 80%
	Storage Humidity	10% to 90%
Accessories	Included	Open Frame Mounting Bracket, Remote Control, User Manual, Power Cable, USB to USB Cable, Wi-Fi Aerial
	Optional	Windows Slot-in OPS PC, Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand
Warranty	Warranty Period	3 Year Warranty
	Technical Support	Lifetime

Errors and omissions excepted






## Specification Table

		50 Inch
Panel	Resolution	3840x2160
	Display Area (mm)	1075.8x606
	Aspect Ratio	16:9
	Brightness (cd/m <sup>2</sup> )	500
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	1,000:1
Touch	Touch Technology	Projected Capacitive
	Touch Points	10
	Glass Hardness	7H minimum
Audio	Speaker Type	3W (x2)
AV Inputs	Inputs	HDMI
Power	Power Consumption (W)	55
	Input Voltage	AC220V
Mechanical	Unit Size (WxHxD mm)	1135.2x665.4x62.7
	OPS PC Specification	200x119x30 (OPS)
	Package Size (WxHxD mm)	1235x765x162
	VESA Holes (mm)	400x400
	Net Weight (kg)	30
	Gross Weight (kg)	32
Environmental	Operating Temperature	0 °C to 40 °C
	Storage Temperature	-20°C to 60°C
	Operating Humidity	20% to 80%
	Storage Humidity	10% to 90%
Accessories	Included	Open Frame Mounting Bracket, Remote Control, User Manual, Power Cable, USB to USB Cable, Wi-Fi Aerial
	Optional	Windows Slot-in OPS PC, Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand
Warranty	Warranty Period	3 Year Warranty
	Technical Support	Lifetime

Errors and omissions excepted



# Technical Drawing

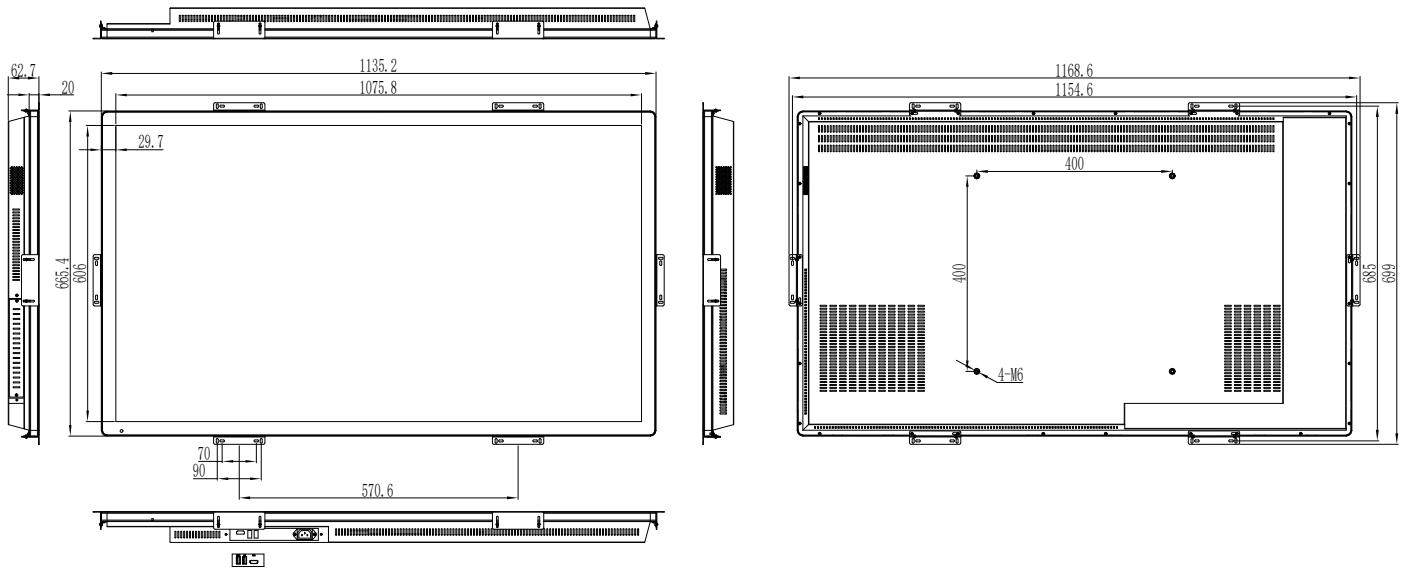



## Specification Table

		55 Inch
Panel	Resolution	3840x2160
	Display Area (mm)	1208.6x679.9
	Aspect Ratio	16:9
	Brightness (cd/m <sup>2</sup> )	500
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	4,500:1
Touch	Touch Technology	Projected Capacitive
	Touch Points	10
	Glass Hardness	7H minimum
Audio	Speaker Type	8W (x2)
AV Inputs	Inputs	HDMI
Power	Power Consumption (W)	150
	Input Voltage	AC220V
Mechanical	Unit Size (WxHxD mm)	1262.6x733.9x63
	OPS PC Specification	200x119x30 (OPS)
	Package Size (WxHxD mm)	1345x800x185
	VESA Holes (mm)	400x400
	Net Weight (kg)	24.2
	Gross Weight (kg)	28.5
Environmental	Operating Temperature	0 °C to 40 °C
	Storage Temperature	-20°C to 60°C
	Operating Humidity	20% to 80%
	Storage Humidity	10% to 90%
Accessories	Included	Open Frame Mounting Bracket, Remote Control, User Manual, Power Cable, USB to USB Cable, Wi-Fi Aerial
	Optional	Windows Slot-in OPS PC, Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand
Warranty	Warranty Period	3 Year Warranty
	Technical Support	Lifetime

Errors and omissions excepted



# Technical Drawing

